



**PS/2 DB-15 KVM**  
**Model: NV401A**  
**NV801A**  
**NV1601A**

## PS/2 DB-15 KVM Benefits

- PS/2 DB-15 KVM with either 4, 8 or 16 ports in 1U
- Mix PS/2, USB & SUN with Multi-Platform switch capability
- Low cost reliable PS/2 based server management
- No software or drivers required
- Easy & quick installation



## Switch Features & Options

- Multi lingual on screen display menu
- Advanced user profiles and configurable OSD hot key combinations
- Dual power with failover

 12V, 24V and 48V DC Power option



## Designed for:

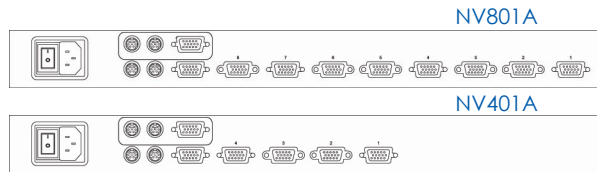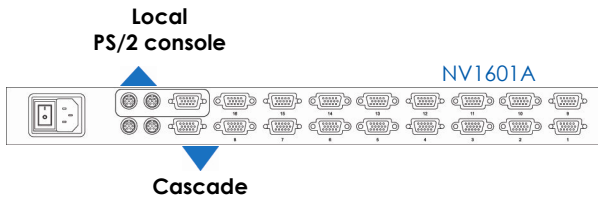

## Technical Specification

- **KVM Port :** 16 / 8 / 4 x RJ-15 connector
- **KVM Cable :** PS/2 3-in-1 KVM cable, up to 6, 10, 15 & 33 feet
- **Local Console :** 1 x DB-15 VGA (up to 1600 x 1200), 2 x PS/2 for KB & MS
- **Expansion :** Up to 128 servers by 8-level cascade
- **Compatibility :** Mix PCs, SUNs, MACs, IBMs, HPs, DELLs server  
Windows Vista / 2003 / XP / 2000, Linux, Netware, Unix
- **Power :** 100~240VAC, 50 / 60Hz 0.3A via IEC type cord  
(12V / 24V / 48V DC input option)
- **Regulatory Approval :** FCC, CE
- **Environmental**  
 Operating / Storage : 0 to 50°C / -5 to 60°C  
 Relative humidity : 90%, non-condensing  
  
 Shock : 50G peak acceleration (11 ms, half-sine wave)  
 Vibration : 58~100Hz / 0.98G (11 ms/ cycle)

## Accessories

ND-6  
ND-15  
ND-10  
ND-33



PS/2 3-in-1 KVM cable - 6, 10, 15 & 33 ft

SUN-31 kit



PS/2 to SUN / USB adapter

NA-6



6ft PS/2 KVM cascade cable

## Dimensions

Model	Product Dimension ( W x D x H )	Packing Dimension ( W x D x H )	Net Weight	Gross Weight
NV401A	443 x 200 x 44 mm 17.4 x 7.9 x 1.73 inch	510 x 400 x 77 mm 20.1 x 15.7 x 3 inch	3.5 kg / 8lbs	4 kg / 9 lbs
NV801A / 1601A	443 x 180 x 44 mm 17.4 x 7.1 x 1.73 inch	510 x 400 x 77 mm 20.1 x 15.7 x 3 inch	4 kg / 9 lbs	4.5 kg / 10 lbs